


MET-WIPL-6WHG24-XX

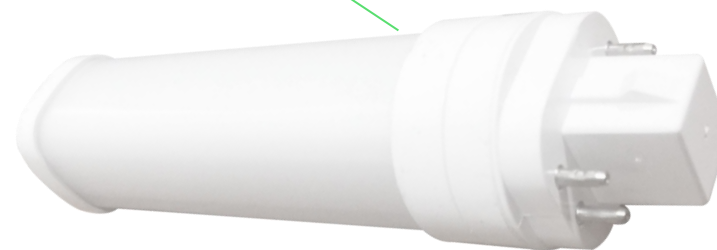

LED Direct Replacement G24 - Horizontal

Product	MET-WIPL-6WHG24-XX	MET-WIPL-HY6WHG24D-XX	MET-WIPL-10W-H624-XX	MET-WIPL-HY11WHG24D-XX
Voltage	120V-277V	120V-277V	120V-277V	120V-277V
Watts	6W	6W	7W	11W
Colour Temperature (K)	3,000/4,000	3,000/4,000	3,000/4,000	3,000/4,000
Lumens	550	550	920	900
Beam Angle	180°	160°	180°	160°
Base	G24Q	G24D	G24Q	G24D
Rated Life	5 years	5 years	5 years	5 years
Dimensions (mm)	34x136	34x136	34x162	34x162
Replaces Fluorescent PL	13W/18W	13W/18W	26W	26W
Installation	Ballast Compatible	Bypass	Ballast Compatible	Bypass

M E T R O S P H E R E P R O T E C T I O N

All of our PL products are cUL/UL certified listed and backed by a **5 year warranty**.



G24D



G24Q

- >> 300° rotatable base
- >> G24D base can bypass ballast or be used with compatible magnetic ballast
- >> G24Q base can be used only with compatible ballast

Engineered to brighten your space